


• Reducer

Sch 40, Sch 80, Sch 160

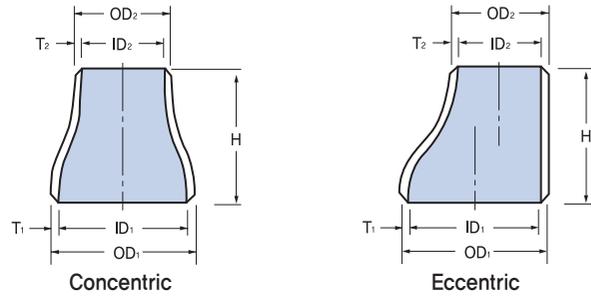

KS B 1541/3, JIS B 2312/3

Unit : mm

Nominal Pipe Size	Outside Diameter		Wall Thickness						End to End H
	OD ₁	OD ₂	Sch 40		Sch 80		Sch 160		
			T ₁	T ₂	T ₁	T ₂	T ₁	T ₂	
20×15	27.2	21.7	2.9	2.8	3.9	3.7	-	-	38.1
25×20	34.0	27.2	3.4	2.9	4.5	3.9	-	-	50.8
25×15	34.0	21.7	3.4	2.8	4.5	3.7	-	-	50.8
32×25	42.7	34.0	3.6	3.4	4.9	4.5	-	-	50.8
32×20	42.7	27.2	3.6	2.9	4.9	3.9	-	-	50.8
32×15	42.7	21.7	3.6	2.8	4.9	3.7	-	-	50.8
40×32	48.6	42.7	3.7	3.6	5.1	4.9	-	-	63.5
40×25	48.6	34.0	3.7	3.4	5.1	4.5	-	-	63.5
40×20	48.6	27.2	3.7	2.9	5.1	3.9	-	-	63.5
40×15	48.6	21.7	3.7	2.8	5.1	3.7	-	-	63.5
50×40	60.5	48.6	3.9	3.7	5.5	5.1	8.7	7.1	76.2
50×32	60.5	42.7	3.9	3.6	5.5	4.9	-	-	76.2
50×25	60.5	34.0	3.9	3.4	5.5	4.5	-	-	76.2
50×20	60.5	27.2	3.9	2.9	5.5	3.9	-	-	76.2
65×50	76.3	60.5	5.2	3.9	7.0	5.5	9.5	8.7	88.9
65×40	76.3	48.6	5.2	3.7	7.0	5.1	9.5	7.1	88.9
65×32	76.3	42.7	5.2	3.6	7.0	4.9	-	-	88.9
65×25	76.3	34.0	5.2	3.4	7.0	4.5	-	-	88.9
80×65	89.1	76.3	5.5	5.2	7.6	7.0	11.1	9.5	88.9
80×50	89.1	60.5	5.5	3.9	7.6	5.5	11.1	8.7	88.9
80×40	89.1	48.6	5.5	3.7	7.6	5.1	11.1	7.1	88.9
80×32	89.1	42.7	5.5	3.6	7.6	4.9	-	-	88.9
90×80	101.6	89.1	5.7	5.5	8.1	7.6	12.7	11.1	101.6
90×65	101.6	76.3	5.7	5.2	8.1	7.0	12.7	9.5	101.6
90×50	101.6	60.5	5.7	3.9	8.1	5.5	12.7	8.7	101.6
90×40	101.6	48.6	5.7	3.7	8.1	5.1	12.7	7.1	101.6
90×32	101.6	42.7	5.7	3.6	8.1	4.9	-	-	101.6
100×90	114.3	101.6	6.0	5.7	8.6	8.1	13.5	12.7	101.6
100×80	114.3	89.1	6.0	5.5	8.6	7.6	13.5	11.1	101.6
100×65	114.3	76.3	6.0	5.2	8.6	7.0	13.5	9.5	101.6
100×50	114.3	60.5	6.0	3.9	8.6	5.5	13.5	8.7	101.6
100×40	114.3	48.6	6.0	3.7	8.6	5.1	13.5	7.1	101.6